



# SPEEDFACE - 8 TM

















Temperature Detection

Live Body Detection

Screen

Touch

LAN


USB

Access Control

### Facial Attendance and Access Control

# Storage Capacity

Face ID Capacity	50,000
Max User	50,000
Log Capacity	1,50,000

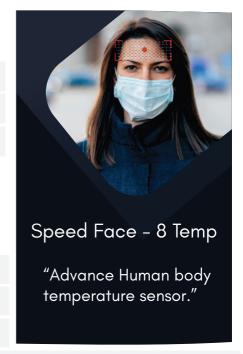

#### **Features**

Industrial grade design, with stable performance & smooth line

Detect 5 person at a time

IP66 protection grade.

8-inch IPS display all-sight LCD touch screen.

High end CPU - Dual core ARM cortex - A7 @900MHz

Detect human body temperature through face punch

Recognition speed 0.5 seconds

# SpeedFace - 8 TM

#### Communication Interface

|--|

#### **Biometric**

Push Data	YES
Remote firmware update	YES
FAR	0.1%
Accuracy ratio	99%
Processor	Dual Core ARM Cortex-A7 @900MHz
OS	Linux
Anti Backlight	YES
Verification time	<=1 second
Additional Feature	Temperature Detection Sensor



Auto Focus



low light Verification



Long Distance Verification



Accepts 5 people at a time



**Detect Body Temperature** 

## Audio/Visual

LCD	8.0" IPS touch screen display
Screen Resolution	800 x 1280
Camera Specification	2 MP: 1932 x 1092
Shutter type	Electronic Rolling Shutter
Body Temperature display	YES

Time Attendance

Software

Desktop, Web, Cloud

# Access control

Living body detection	YES
Relay	YES
Storage	512 MB RAM , 8GB ROM



Access Control



Employee Self Service



Mobile App

### Power & Environment

Operating Temperature	-10°c ~ 50°c
Power	12V DC / 2A
Dimension	126 ± 0.20mm x 469.10 ± 0.20mm x 114.07mm

Disclaimer: Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Connect with us on







