

## MOOVI

### Electromechanical barrier for intensive use.

- Range of barriers for intensive use, able to manage useful passages up to 6 m. The wide range of accessories available makes them ideal in any context
- Also available in Moovi 30S rapid version with opening speed of 1.5s (plus slowdown) and intensive use.
- Control unit with programming display and incorporated two-channel radio receiver (models Moovi 30/60RMM/30S)




rolling code



er ready



ee link

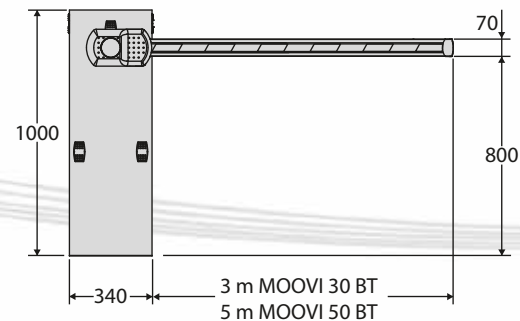

## FEATURES

- Control unit with display and incorporated receiver
- Impact reaction via encoder

## SPECIFICATIONS

	<b>MOOVI 30S</b>	<b>MOOVI 30</b>	<b>MOOVI 30 RMM</b>	<b>MOOVI 60</b>	<b>MOOVI 60 RMM</b>
Useful passage	3 metres	3 metres	3 metres	6 metres	6 metres
Control unit	Leo MV D	Alpha Bom	Leo MV D	Alpha Bom	Leo MV D
Motor power supply	230V	230V	230V	230V	230V
opening or closing	1.5sec + slowdown	4 seconds	4 seconds	8 seconds	8 seconds
Type of limit switch	Type of electric limit switches incorp. and adjustable				
Slowdown	adjustable	adjustable	adjustable	adjustable	adjustable
Impact reaction	encoder	encoder	encoder	encoder	encoder
Lock	mechanical	mechanical	mechanical	mechanical	mechanical
Release	personal key				
Frequency of use	intensive	semi-intensive	semi-intensive	semi-intensive	semi-intensive
Ambient conditions	-10°C to +55°C*	-10°C to +55°C*	-10°C to +55°C*	-10°C to +55°C*	-10°C to +55°C*
Protection rating	IP24	IP24	IP24	IP24	IP24