

UNIVERSAL CABINET SPEAKER



BS 6140


Forerunner

BS 6130

SPL vs Frequency

BS 6130/6140

Forerunner



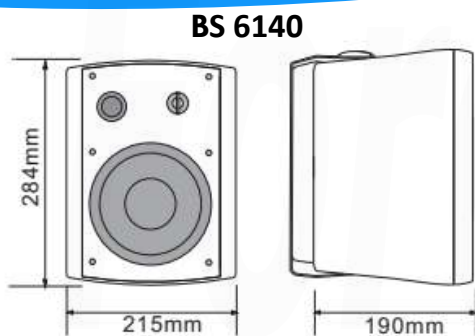


With a smart pan and tilt bracketing system, allowing both wall or ceiling mounting these high quality speakers are ideal for use in places of education, shopping centres, common areas, clubs, restaurants, fire evacuation systems and many more applications that requires a reliable high quality affordable commercial wall mounting speaker product.

Model	BS 6130	BS 6140
Rated Power (W)	30W	40W
Input Line Voltage	100V with step-down transformer	100V with step-down transformer
Frequency Response (Hz)	80Hz-18KHz(±3dB)	70Hz-18KHz(±3dB)
Sensitivity (1w,1n)	89±3 dB	91±3 dB
Speaker Unit	Woofers 1*6.5"+ tweeter 1*1.5"	Woofers 1*6"+ tweeter 1*1"
Material	ABS housing and bracket	ABS housing, metal bracket
Finish	White or Black	White or Black
Installation	Wall Mounting	Wall Mounting
Dimensions (mm)	285x185x130mm	285x220x190mm
Weight	2.6kg	3.5kg

BS 6130

Installation Steps:

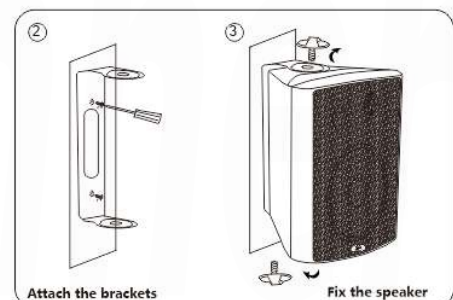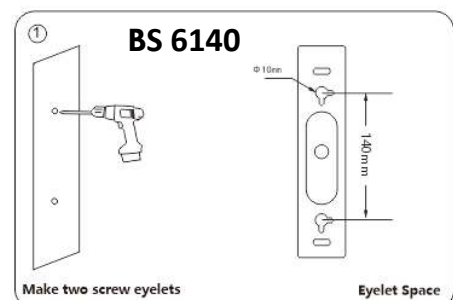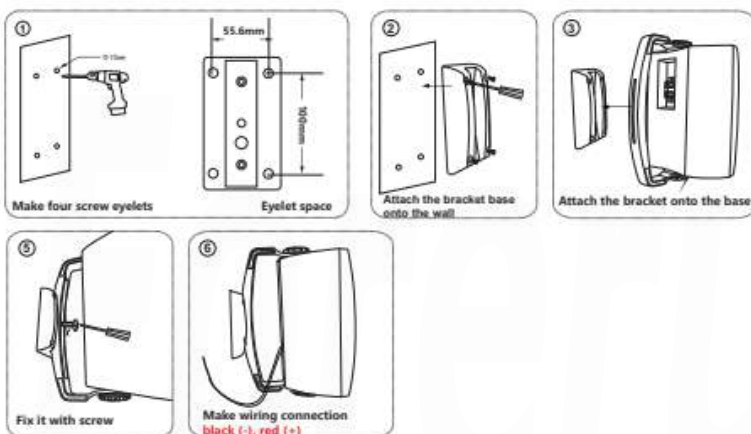

As part of awWILLS's ongoing commitment to product development, specifications are subject to change without notice.