

HIGH POWER PP CONE CO-AXIAL CEILING SPEAKER

awWILLS
audio intelligence

20W/ 10W/ 5W
30W/ 15W/ 7.5W
40W/ 20W/ 10W

@
100 Volts



Forerunner CS 2051
CS 3061
CS 4081

- + Ideal for use in a Voice alarm/BGM system
- + 1" tweeter for better sound reproduction
- + Multi tapping to suit power requirements
- + Polypropylene cone for enhanced lifespan
- + Four arm fine adjustment assembling system

The **Forerunner** CS2051/3061/4081 are 2-way flush-mounting ceiling loudspeakers ideally suited for a wide variety of foreground and background sound reinforcement applications. The CS coaxial loudspeaker series with multiple watts power tapping utilize the 70/100V configuration. The steel grille is mounted onto the loudspeaker's ABS frame. All plastic parts are manufactured from self-extinguishing high-impact ABS material.


The **Forerunner** co-axial series CS2051, CS3061, CS4081 provide cost effective solutions for scores of commercial audio applications such as education, shopping centres, common areas, clubs, restaurants, fire evacuation systems and many more applications that requires a reliable high quality affordable commercial ceiling speaker product.

The CS Series offers integrators a premium quality sound solution where performance, consistent coverage, and aesthetics are paramount.

Features

- *4x long travel dog-ear blind mount system
 - *Snap fit magnetic grille
 - *Uniform frequency response over the coverage area
 - *Low-loss 100V transformer with selectable taps
 - *Highly durable poly-propylene cone with one inch tweeter
- Specifically designed to maintain a consistent tonal characteristic across the entire CS co-axial series, the CS Series allows integrators seamless transitions within blended installations

SPL vs Frequency

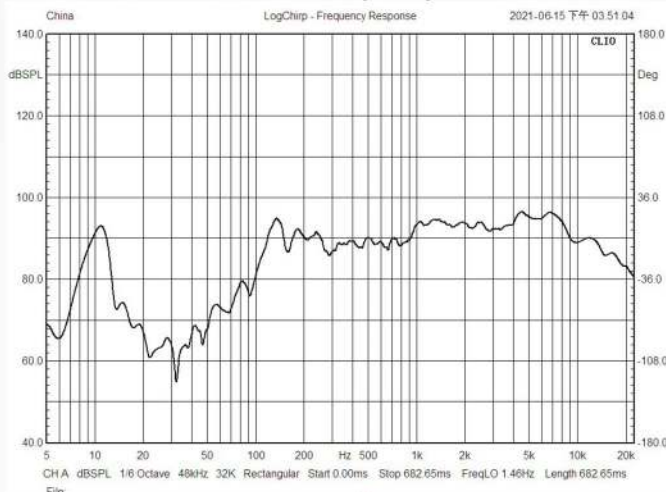

4 arm fine adjustment assembling system

Precise assembly through a special 4-arm adjustment assembling, suitable for ceiling widths up to 40 mm. Multiple watt power taps, excellent voice and music reproduction. Frame and grid in white.


Specifications

Model	CS 2051	CS 3061	CS 4081
Rated Power	10W/20W	15W/30W	20W/40W
Input Voltage	70V/100V	70V/100V	70V/100V
Frequency Response	100Hz-20KHz	90Hz-20KHz	60Hz-20KHz
Sensitivity(1w,1n)	88±3 dB	90±3 dB	93±3 dB
Hole for mounting	Φ170mm	Φ200mm	Φ240mm
Dimension	Φ203*150mm	Φ230*155mm	Φ270*190mm
Finished	White	White	White
Material	ABS enclosure & metal grille	ABS enclosure & metal grille	ABS enclosure & metal grille
Speaker Unit	5"*1+1"*1	6"*1+1"*1	8"*1+1"*1
Weight	1.2kg	1.6kg	2.1kg


Dimensions



CS 2051

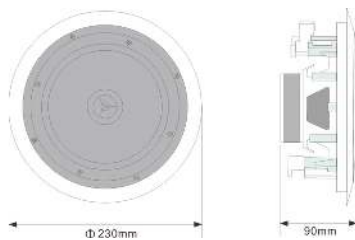

CS 3061

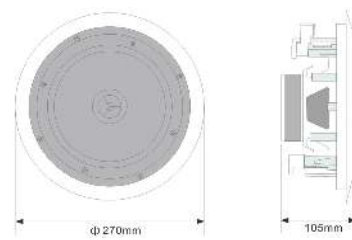

CS 4081

