

# KS242P-3CF3CE

## HIGH EFFICIENCY MULTICRYSTALLINE PHOTOVOLTAIC MODULE

**IEC 61215Ed.2  
EN61730**

This module is manufactured in ISO9001 certified factories.  
Registered No.: JMI0036 (Japan), CN07/00321 (China), 01 100 528 050018 (Czech Republic), FM26856 (Mexico)  
TUVdotCOM Internet platform for tested quality and service ID 0000023299.



## HIGHLIGHTS OF KYOCERA PHOTOVOLTAIC MODULES

Kyocera's advanced cell processing technology and automated production facilities produce highly efficient multicrystalline photovoltaic modules.

The conversion efficiency of the Kyocera solar cell is over 16%.

These cells are encapsulated between a tempered glass cover and a pottant with back sheet to provide efficient protection from severe environmental conditions.

The entire laminate is installed in an anodized aluminum frame to provide structural strength and ease of installation.

Equipped with plug in connectors.

## APPLICATIONS

### Grid-Connected Systems

- Residential Solar Power Systems
- Public and Industrial Solar Power Systems

### Stand -Alone Solar Power Systems for

- Villages in remote areas
- Homes and summer cottages

- Microwave/Radio repeater stations
- Medical facilities in rural areas
- Emergency communication
- Water quality and environmental data monitoring
- Drinking and livestock water pumping
- Irrigation pumping

- Cathodic protection
- Aviation obstruction lighting
- Environmental data monitoring
- Railway signals
- Street lighting
- Desalination

## LIMITED WARRANTY


\*Limited warranty on material and workmanship: For warranty period, please refer to Warranty issued by Kyocera

\*20years limited warranty on power output: For detail, please refer to "category IV" in Warranty issued by Kyocera


(Long term output warranty shall warrant if PV Module(s) exhibits power output of less than 90% of the original minimum rated power specified at the time of sale within 10 years and less than 80% within 20 years after the date of sale the Customer. The power output values shall be those measured under Kyocera's standard measurement conditions. Regarding the warranty conditions in detail, please refer to Warranty issued by Kyocera)

## ELECTRICAL CHARACTERISTICS


Current-Voltage characteristics of Photovoltaic Module KS242 at various cell temperatures at Kyocera Corporation laboratory.

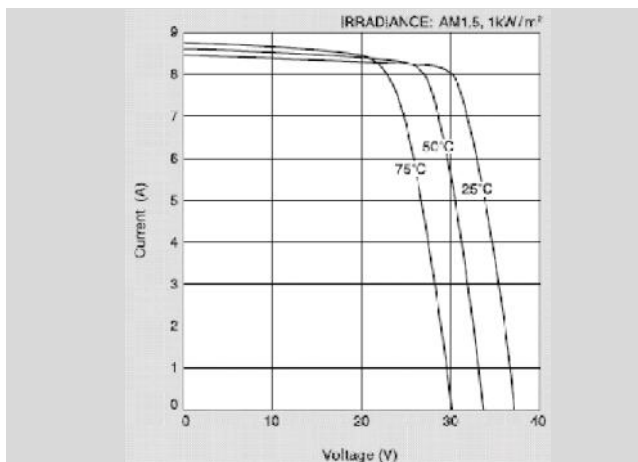

Current-Voltage characteristics of Photovoltaic Module KS242 at various irradiance levels at Kyocera Corporation laboratory.

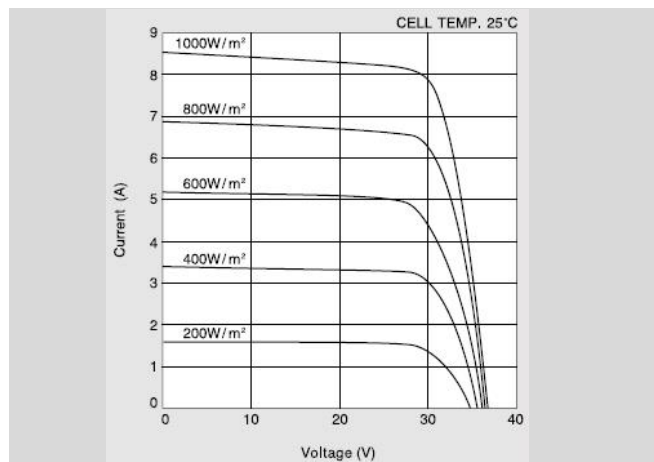

**Physical Specifications**

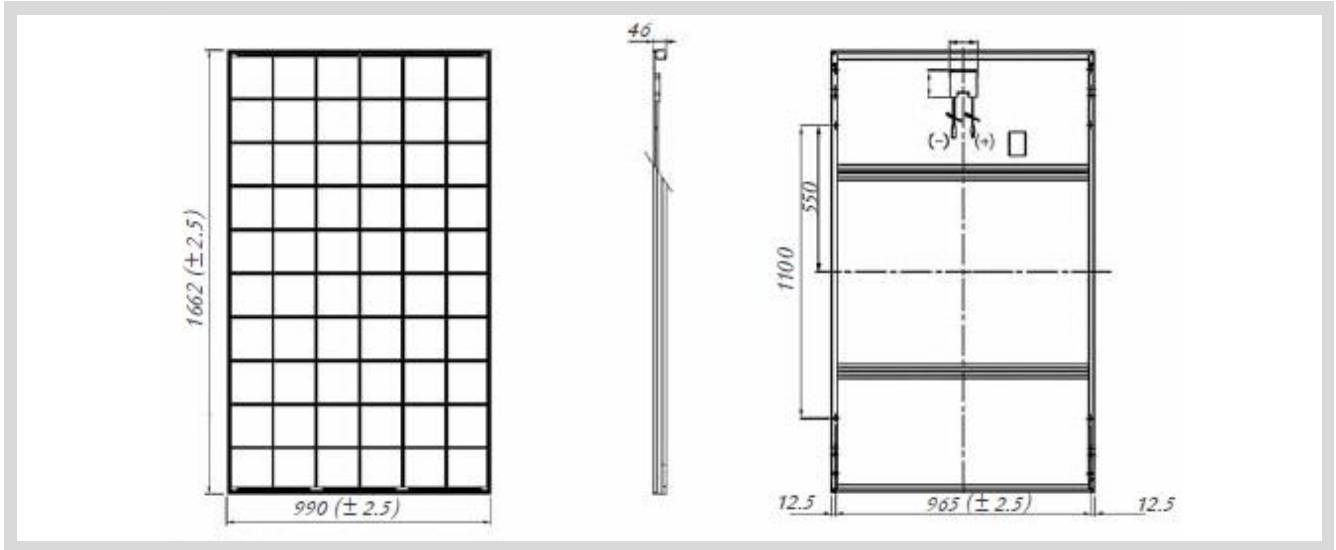

**Specifications**

KS242P-3CF3CE	
<b>Electrical Performance under Standard Test Conditions (STC*)</b>	
Maximum Power (Pmax)	242 W
Maximum Power Voltage (Vmpp)	29.8 V
Maximum Power Current (Impp)	8.13 A
Open Circuit Voltage (Voc)	36.9 V
Short Circuit Current (Isc)	8.80 A
Max System Voltage	600 V
*STC: Irradiance 1000W/m2, AM1.5 spectrum, module temperature 25°C	
<b>Cells</b>	
Number per Module	60
Cell Technology	Multicrystalline
<b>Module Characteristics</b>	
Length x Width x Depth without Box	1662 x 990 x 46 mm
Weight	20.0 kg
Cable	(+)720 / (-) 2205 mm
<b>Others</b>	
Limiting Reverse Current	15 A
Mechanical load	Pressure 2400 Pa

**KYOCERA Corporation**

**Headquarters**

Corporate Solar Energy Group

6 Takeda Tobadono-cho Fushimi-ku, Kyoto

612-8501, Japan

TEL: 81-75-604-3476

<http://www.kyocera.com/>

**KYOCERA Asia Pacific Pte. Ltd.**

298 Tiong Bahru Road, #13-03/05

Central Plaza, 168730, Singapore

TEL: 65-6271-0500

<http://www.kyocera.com.sg>