


SC517/WH or BR/MULTI/G3/EN
SURFACE CONTACT

**GRADE 3
 COMPLIANT**



- 4 Terminals
- Microswitch tamper
- Selectable end of line resistor
- Can use own resistors
- Available in white or brown
- Can be fitted in double pole systems
- Can be used on double door configuration
- Magnetic Interference Detection

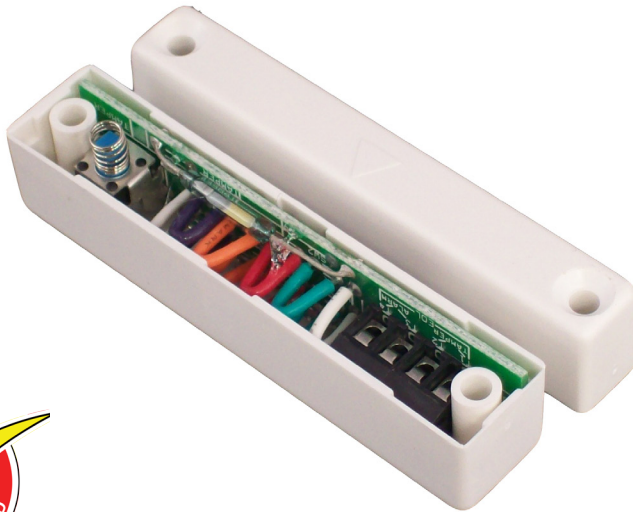

Specifications

SC517 Grade 3

<i>Connections</i>	4 Terminals	<i>Voltage Range</i>	12Vdc
<i>Reed Switches</i>	2	<i>Switching Current</i>	500mA @ 12Vdc
<i>Pull-in Gap</i>	10mm	<i>Contact Material</i>	Rhodium
<i>Material</i>	High Impact Polystyrene	<i>Colours</i>	White or Brown
<i>Contact Size</i>	65 x 13 x 13mm	<i>Tamper</i>	Microswitch
<i>Magnet Size</i>	65 x 11 x 13mm	<i>Magnetic Detection</i>	Yes
<i>Contact Form</i>	SPST form A	<i>Standards</i>	EN50131-2-6 Grade 3
		<i>Environmental Class</i>	II



Address: CQR Fire & Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH, UK.

Contact us:

Phone:

Tel: +44(0)151 6061000

Fax: +44(0)151 6061122

Online:

Web: www.cqr.co.uk

Email: info@cqr.co.uk

